

AC 176

Self Contained Ice Machine - 50 Hz
up to 85 kg

Item #:
Project:
Quantity:



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only)
- Easily accessible front panel mount ON-OFF Switch
- Routine Maintenance visible alarm light on front pane
- Ergonomically designed ice-storage access, with disappearing door
- Door-closing movement dampening system



AC L 176
Large Gourmet 39 g
Ø 38 x H 41 mm



AC M 176
Medium Gourmet 20 g
Ø 30 x H 34 mm



AC S 176
Small Gourmet 8 g
Ø 21 x H 25 mm

CONDENSING SYSTEM

Air cooled
Water cooled

INTERNAL BIN CAPACITY

41 kg

REFRIGERANT GAS

R134a
R404A

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

VOLTAGE V/Hz/ph

115/60/1
230/50/1
230/60/1

Certifications:



IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com


Self Contained Ice Machine - 50 Hz up to 85 kg

AC 176

Self Contained Ice Machine - 50 Hz
up to 85 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine - 50 Hz up to 85 kg

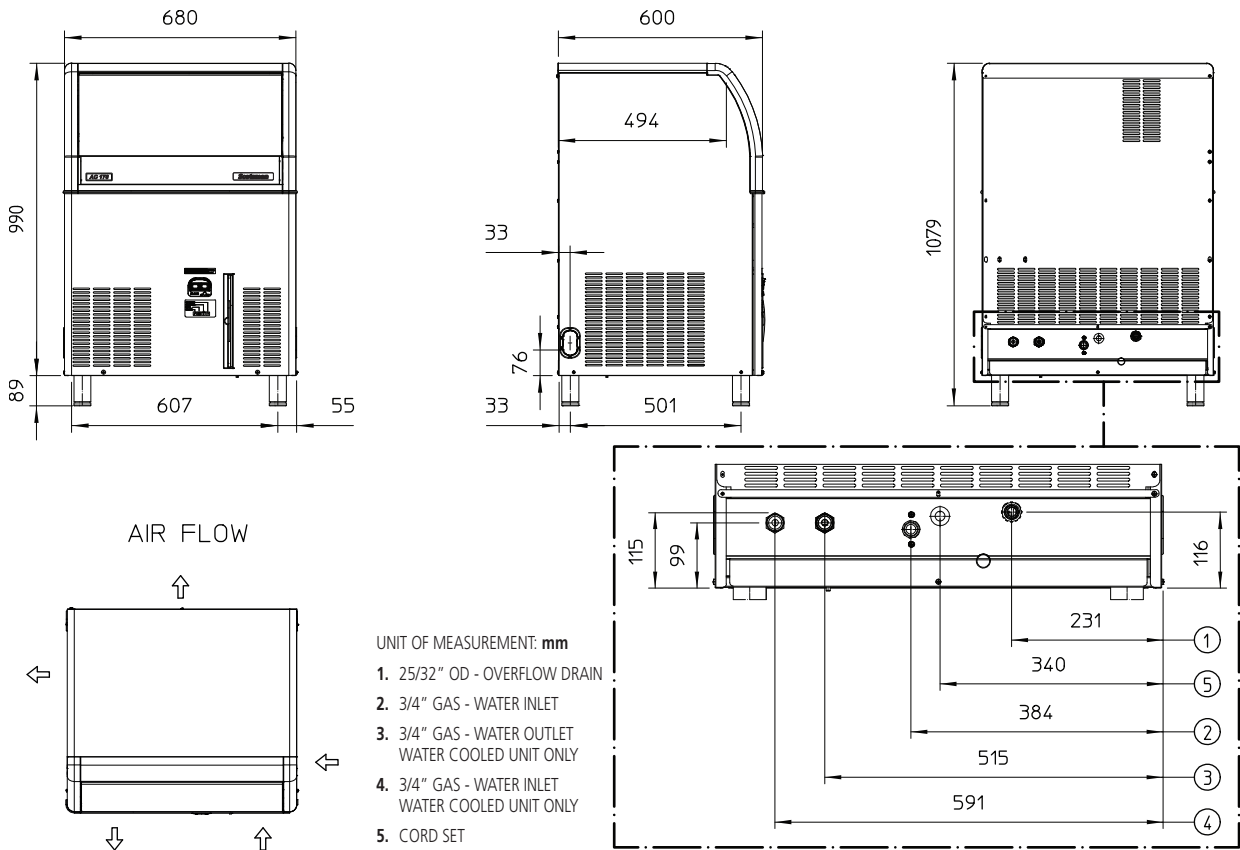

UNIT DATA			Compressor		Circuit wires		Max. fuse size		
			Version	Voltage	Btu/h	W	No.	Ømm ²	A
Size (W x D x H)	680 x 600 x 1120 mm		AC S 176 WS	230/50/1	5118	1500	3	1.5	16
Net weight	70 kg		AC L 176 AS	230/50/1	5132	1504	3	1.5	16
SHIPPING DATA			AC L 176 WS	230/50/1	5132	1504	3	1.5	16
			AC M 176 AS	230/50/1	2491	730	3	1.5	16
Carton (W x D x H)	750 x 670 x 1170 mm		AC M 176 WS	230/50/1	5118	1500	3	1.5	16
Weight	80 kg		AC S 176 AS	230/50/1	5118	1500	3	1.5	16
			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
AC S 176 WS	Water	230/50/1	70	69	55	29.1	16.0	79.2	760
AC L 176 AS	Air	230/50/1	71	70	58	25.9	15.0	7.9	860
AC L 176 WS	Water	230/50/1	71	70	58	25.9	15.0	79.2	610
AC M 176 AS	Air	230/50/1	85	83	65	25.7	16.7	7.1	900
AC M 176 WS	Water	230/50/1	85	80	68	20.6	14.0	79.2	610
AC S 176 AS	Air	230/50/1	70	69	55	29.1	16.0	9.6	900

(* Data refer to 32°C Amb. / 21°C Water temperature conditions)